



ERDWICH


... SHREDDING UNLIMITED ...

ERDWICH
RIPPER

RM 1350/2 - 1500

RM 1350/2 - 2000

RM 1350/2 - 2500

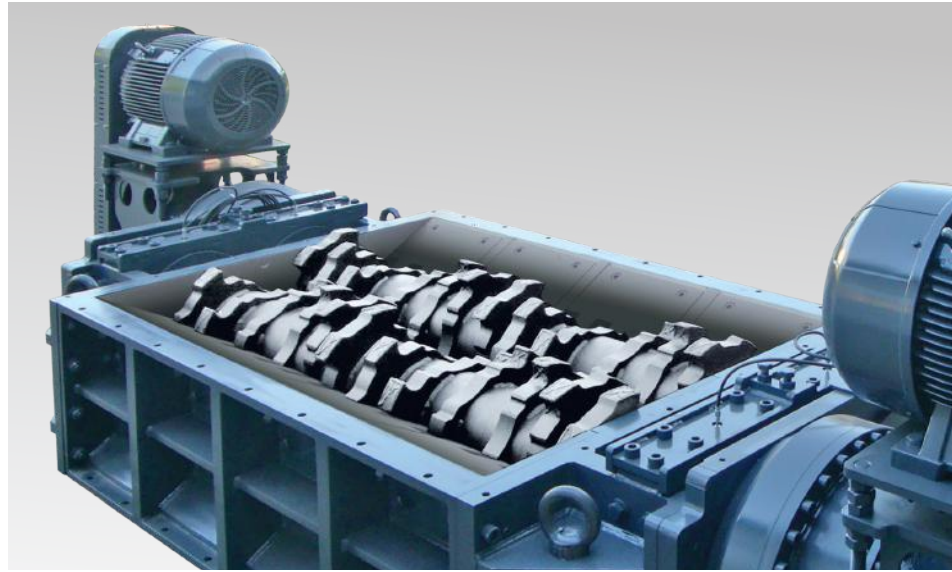

Advantages and special features

ERDWICH RIPPER RM1350

■ Simple maintenance:

- | Fast access to cutter shafts
- | Automated, centralised lubrication system for shaft bearing

■ Savings on operating costs:

- | Long service life guaranteed by weldable shredder blades and shredder sections made from wear resistant steel

■ Optimum shredding:

- | Specialised shredder system, separately configurable to match a variety of materials
- | Variable motor speed control via frequency converter

■ Maximum possible throughput:

- | Electromechanical high-torque gears for each shredder shaft
- | Independent, alternating forward/reverse shredder operation for each shredder shaft

■ Robust and long-lasting:

- | Generously dimensioned special bearing and milled shredder shafts
- | Extra integrated bulkhead seals to protect the shaft bearing against fluids and aggressive materials

■ Cost-effective and safe operation:

- | PLC unit featuring automated reverse and power cut-off to protect the machine against damage from overloading or oversized solid parts
- | Power-optimised frequency convertor for each shaft



ERDWICH


... SHREDDING UNLIMITED ...

ERDWICH
RIPPER

RM 1350/2 - 1500


RM 1350/2 - 2000

RM 1350/2 - 2500

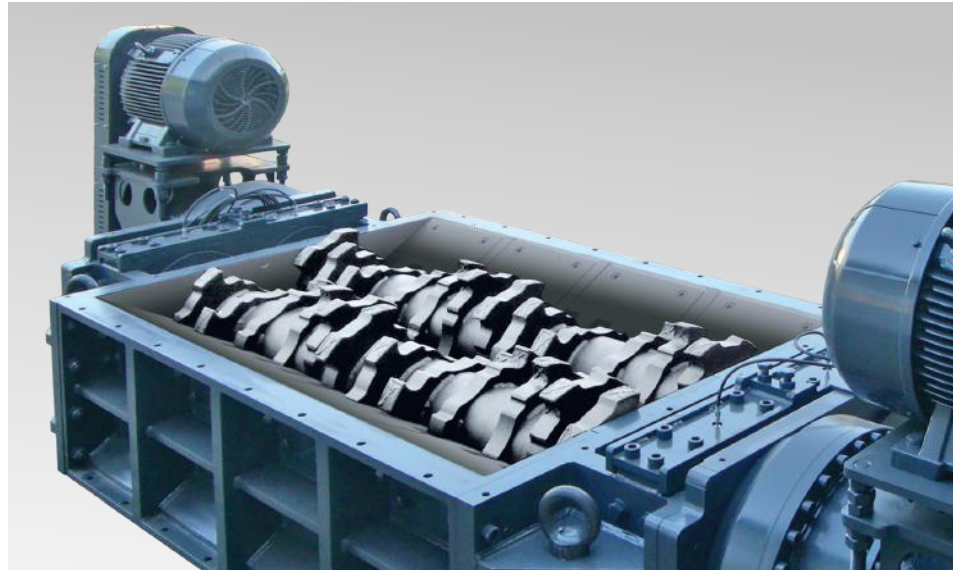

Technical Data

Type	Number of shafts	Drive power in kW	Cutting unit size (LxW) mm	Weight (kg)	Width of rotor knife (mm)
RM1350/-1500	2	2 x 45 -132	1.500 x 1.350	17.000	50 - 300
RM1350/-2000	2	2 x 45 - 132	2.000 x 1.350	20.000	50 - 300
RM1350/-2500	2	2 x 45 - 132	2.500 x 1.350	23.000	50 - 300



Dimensions with compact gear unit:				
	Dimension	RM1350/-1500	RM1350/-2000	RM1350/-2500
Overall length A	mm	3.950	4.450	4.950
Overall width B	mm	2.300	2.300	2.300
Overall height C	mm	1.850	1.850	1.850
Width of cutting gear D	mm	1.350	1.350	1.350
Length of cutting gear E	mm	1.500	2.000	2.500
Height of cutting gear F	mm	600	600	600

Dimensions with epicyclic gear unit:		
RM1350/-1500	RM1350/-2000	RM1350/-2500
4.500	5.000	5.500
2.300	2.300	2.300
1.300 - 1.800	1.300 - 1.800	1.300 - 1.800
1.350	1.350	1.350
1.500	2.000	2.500
600	600	600

Subject to technical changes.

